



Product Details

FLEXIBLE SOLAR PANEL


SFG220

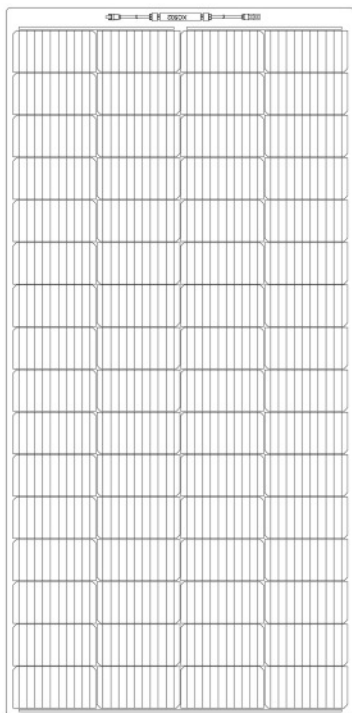

Module Diagram

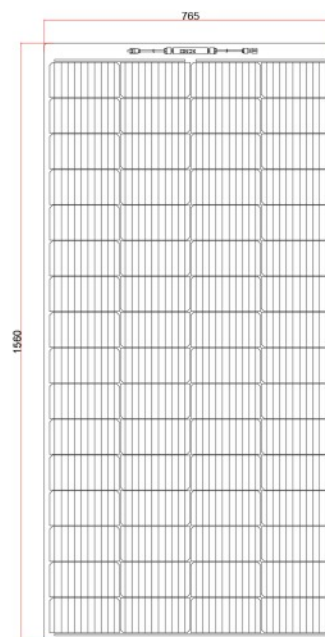

Solar panel bending diagram



— : Solar panel

Electrical Characteristics

Maximum power(Pmax)	220W
Open-circuit voltage(Voc)	21.72V
Voltage at Pmax(Vmp)	18.56V
Short-circuit current(Isc)	12.45A
Current at Pmax(Imp)	11.86A
Cells Efficiency(%)	22.7%
The maximum system voltage	600V DC(IEC)
Power temperature coefficient	-0.35%/°C
Voltage temperature coefficient	-0.275%/°C
Current temperature coefficient	0.045%/°C
Output power tolerance	±5%
Operating Temperature	-40°C~+85°C

Specifications

Solar cell brand	A grade mono solar cells 182mm
No.of cells and connections	64(4*16)
Module dimension	1560*765*3mm
Weight	4.12KG
Output cable	JB (2*bypass diodes) + 500mm/4mm ² cable
Waterproof	IP68
Maximum bending arch height	270mm
Warranty	6-year warranty

Product Introduction

Sunshine Solar's SFG - series photovoltaic panel is an innovative glass-free solar panel.

It adopts proven crystalline silicon solar cell technology.

Its technology and polymer composite material truly realize glass-free, lightweight and thin flexible solar panels.

SFG series is as light as 3.5kg/m², which is 30% of the weight of rigid solar panels.

