



Product Details

RIGID SOLAR PANEL SRG145

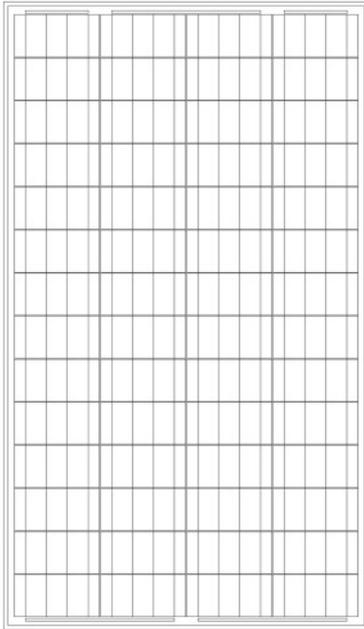

Module Diagram

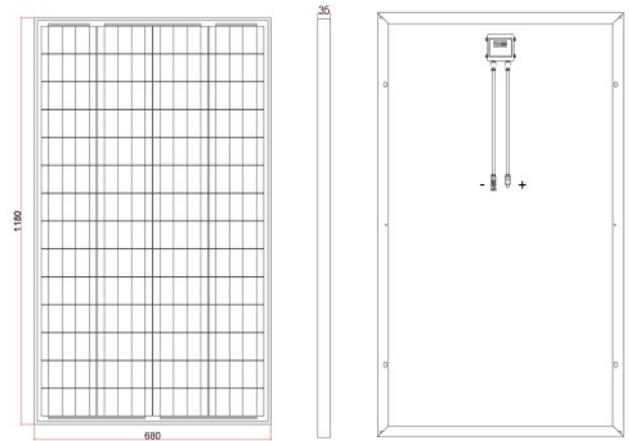

Electrical Characteristics

Maximum power(Pmax)	145W
Open-circuit voltage(Voc)	38.6V
Voltage at Pmax(Vmp)	33.0V
Short-circuit current(Isc)	4.61A
Current at Pmax(Imp)	4.40A
Cells Efficiency(%)	22.7%
The maximum system voltage	1000V DC(IEC)
Power temperature coefficient	-0.35%/°C
Voltage temperature coefficient	-0.275%/°C
Current temperature coefficient	0.045%/°C
Output power tolerance	±3%
Operating Temperature	-40°C~85°C

Specifications

Solar cell brand	A grade mono solar cells 182mm
No. of cells and connections	56(4*14)
Module dimension	1180*680*35mm
Weight	8.6KG
Output cable	2*diodes + 900mm/2.5mm ² cable+MC4 compatible
Approvals	IP65
Certifications	CE, ROHS, FCC
Warranty	10 years

Product Introduction

On the 182 mm single solar cell, the unique front, and back electrode pattern design improves the mechanical load of the module and reduces the fragmentation rate in the production of the module; combined with the excellent anti-PID performance, it ensures the stability of the power generation of the module, effectively The conversion efficiency of the module is improved.

