

## SSP110P

### 110W Rigid Solar Panel



Maximum Power (Pmax)	110W ± 3%
Maximum Power Current (Ipm)	5.56A
Maximum Power Voltage (Vpm)	18.00V
Short Circuit Current (Isc)	5.81A
Open Circuit Voltage (Voc)	22.5V
Nominal Operating Cell Temp. (NOCT)	-40 to 85°C
Cell Efficiency %	18.43
Size	664mm x 1006mm x 35mm
Weight	6.87kg

#### Features

- Aluminium Frame
- Toughened Glass
- 4mm Single Core Cable fitted with type MC4 Connectors (length 900mm)
- High Performance Crystalline Cells

*5 Years Manufacturers Warranty*



*10 Years Warranty 90% Power Output*

*20 Years Warranty 80% Power Output*

Sunshine Solar Limited  
Unit 30, Ashwellthorpe Industrial Estate Ashwellthorpe  
Norwich Norfolk NR16 1ER

Tel: +44 (0)1508 488188

[www.sunshinesolar.co.uk](http://www.sunshinesolar.co.uk) - [support@sunshinesolar.co.uk](mailto:support@sunshinesolar.co.uk)

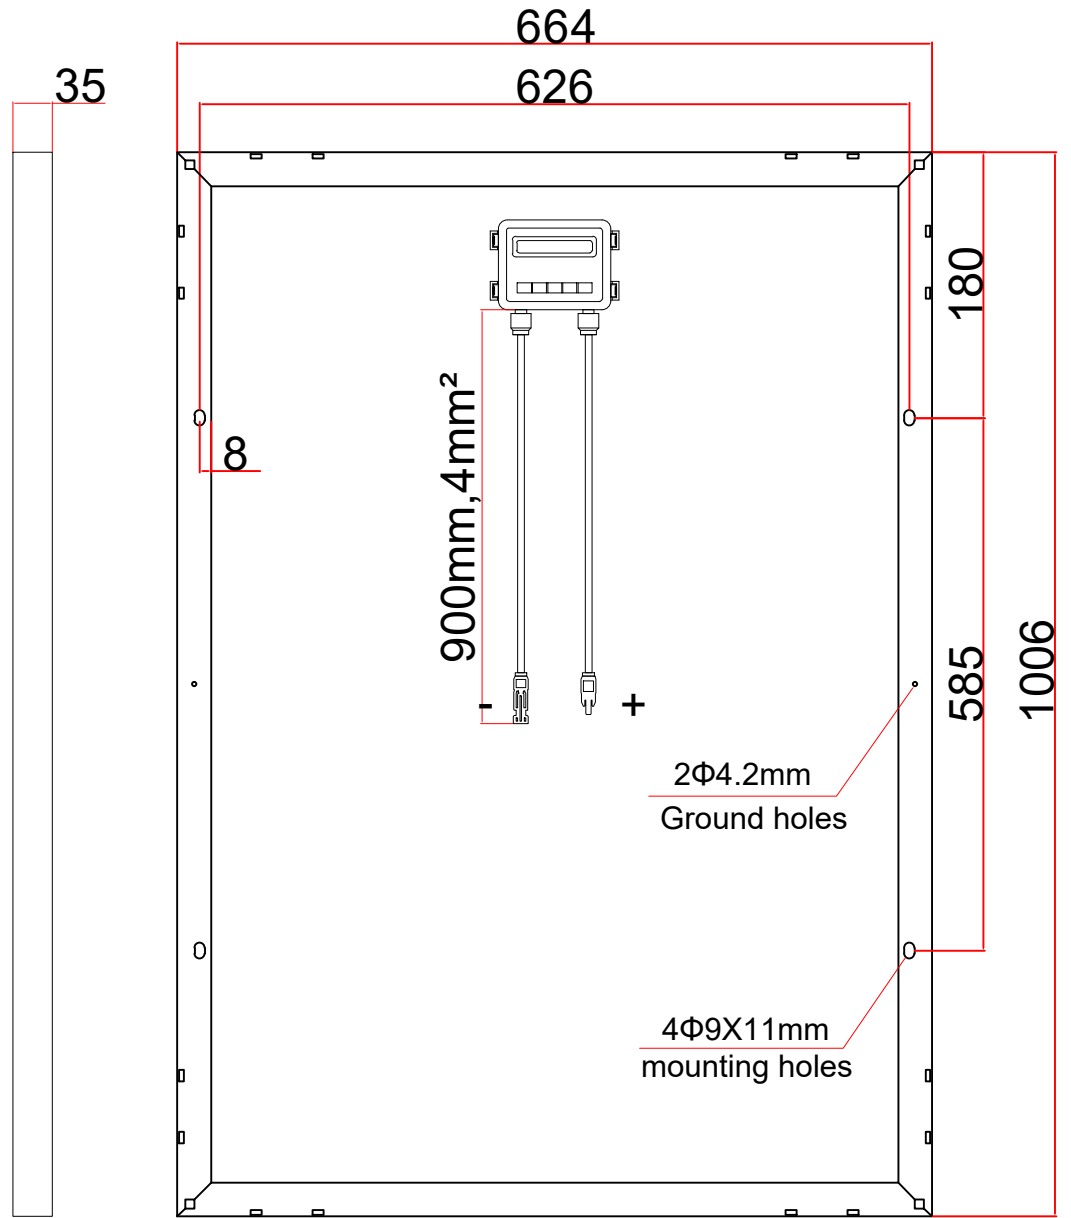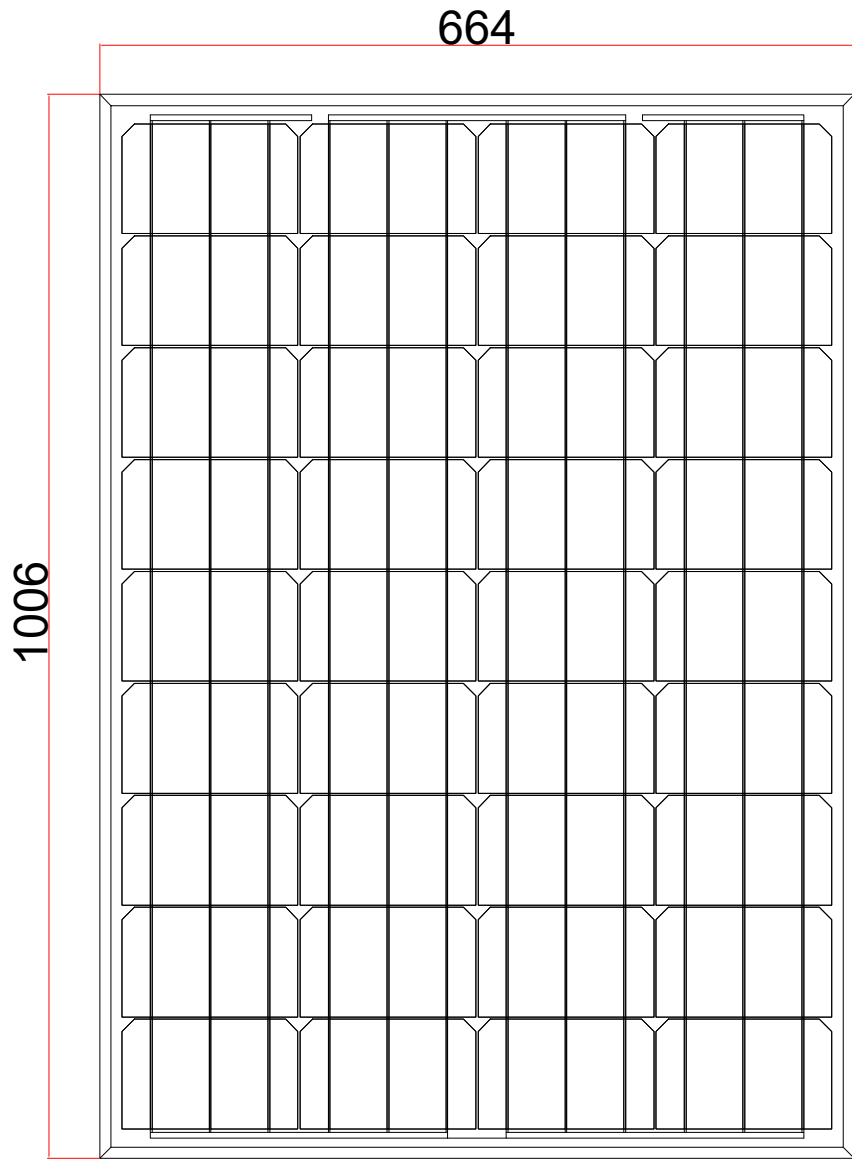

110W