

eTrek 1200 PORTABLE POWER STATION













Outdoor Portable
Power Supply
Intelligent
HD display



www.sunshinesolar.co.uk
email: support@sunshinesolar.co.uk
tel: + 44 (0)1508 488188

eTrek 1200

POWER ON THE MOVE

 <p>iphone (3110mAh) 65+ Charges</p>	 <p>Tablet PC (30Wh) 35+ Charges</p>	 <p>Laptop (60Wh) 7+ Charges</p>	 <p>Light (10W) 87+ Hrs</p>
 <p>Camera(16Wh) 62+ Charges</p>	 <p>Drone(60Wh) 17+ Charges</p>	 <p>Mini Cooler (50W) 17.5+ Hrs</p>	 <p>Fanner(30W) 29+ Hrs</p>
 <p>Electric Tool (30Wh) 2.5+ Hrs</p>	 <p>WIFI (10W) 87+ Hrs</p>	 <p>TV (110W) 7.9+ Hrs</p>	 <p>Ventilator (40W) 21.8+ Hrs</p>



CHOOSE HOW YOU RECHARGE

3 Ways to Recharge




Wall Outlet

5 Hours



Car Charging

12 Hours



100W+100W

Solar Panel

8 Hours


10 Outputs for Outdoor Devices Compact but Powerful



 **Sunshine™**
SOLAR
the sun belongs to everyone

1200W PURE SINE WAVE POWER INVERTER

High Stability
Protect Your Devices From Damage

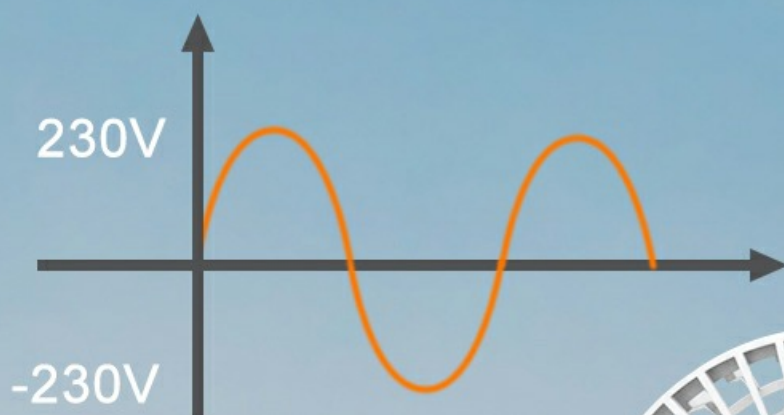

www.sunshinesolar.co.uk

email: support@sunshinesolar.co.uk

tel: + 44 (0)1508 488188

BATTERY MANAGEMENT SYSTEM



Over Discharge Protection



Overload Protection



Overcharge Protection



Short Circuit Protection



Overvoltage Protection



Over Temperature Protection



Low Temperature Protection



eTrek 1200 Product Parameters



Product model	eTrek1200
Cell type	LiFePO ₄
Output mode	Pure sine wave current output
Battery capacity	992Wh (32V, 31Ah)
Input	12~30V (200W Max)
Output	2*DC output port(φ5.5*2.1mm DC): 12V/10A 1*Car output port: 12V/10A USB output port: USB-A:5V/3A; 9V/2A; 12V/1.5A (18W Max) *2 USB-C (PD) *2: PD 60W (left) / PD 18W (right) 5V/3A; 9V/3A; 12V/3A; 15V/3A; 20V/3A (60W Max)
Operating Temp	0°C~40°C
Size(mm/inches)	330 (12.99)*220(8.66)*289(11.37)
Weight	11.0Kg ±0.5Kg